



12 Seater Bus



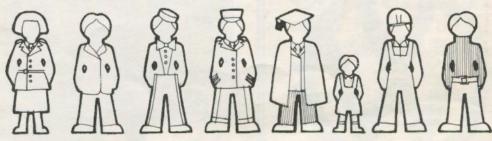

for people who work for people





Personnel Bus

We have to move our people around a lot. Our Devon Bus saves us using four cars. Capacity is a big factor but its economy is also important and it all adds up to greater efficiency.




Site Bus

The Devon Bus is the ideal vehicle for getting my men to and from building sites. Reliable easy starting in winter saves time. It doubles as a site transporter too whenever it is needed.




School Bus

Our Devon Bus is probably our biggest luxury as well as a necessity. We no longer have to rely on others to take our sports teams to away games. For educational visits to museums or other places of interest it's ideal. It drives and parks like a car and takes all the gear for the children too. We wouldn't be without our Devon Bus I can tell you!

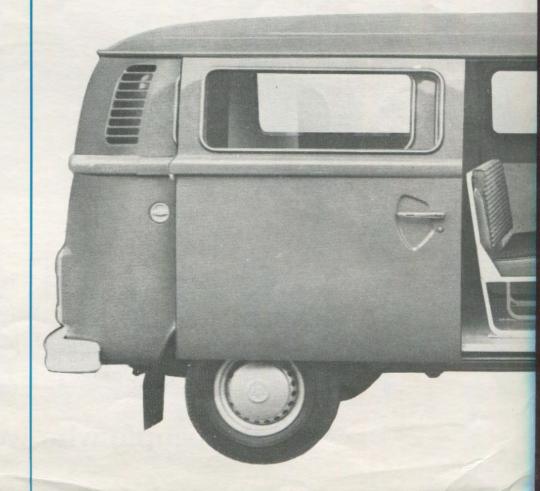




for taking people places.




Crew Bus

When you have to get aircrews and equipment to a plane, it is of utmost importance that the vehicle is reliable – our Devon Bus is certainly that! For moving staff to any part of the airfield it's our No. 1 vehicle. We also use it for airport hotel transfers and as a general runabout too.




Hotel Courtesy Bus

Hotels like ours build their reputation on service and courtesy. A Devon Bus is a must for conveying guests to and from stations, airports and town. And it never says no to being a handy runabout for luggage and odd jobs.



Welfare Bus

Associations, Clubs, Nursing Homes, Hospitals... There is no end to the uses to which the Devon Bus can be put, for taking people places in comfort. Its economic performance puts it in a class of its own – and it parks just like a car. Our lady drivers say the Devon Bus is wonderful.



Hire Bus

Our car hire company would not be without its Devon Bus fleet. They mean trouble free hiring at worthwhile profit. We find an all-year round demand but our winter Devon Bus business is specially valuable to us.



Devon Conversions

official converters of the 12 Seater Bus for Volkswagen (GB) Limited



Devon 12 Seater Bus. Specifications

Air cooled, 4 cylinder, 4 stroke, horizontally opposed, rear mounted, petrol.

Bore 85.5mm 69.0mm 94.0mm 71.0mm Stroke Cubic Capacity 1584cc 1970cc Compression ratio
Output — kW
— DIN 7.5:1 37 kW 50 bhp 51 kW 70 bhp 48 bhp - S.A.E. net 4000/min 4200/min 143 Nm 14.3 mkg 98.6 lb.ft. Maximum Torque — Nm — DIN 108 Nm 10.8 mkg

74.5 lb.ft. -S.A.E 2800/min 2800/ min Fuel Rating (RON)

Filling Capacities

13.2 gals imperial (including 1.1 gal reserve) 4.4/6.2 pints (1600cc/ 2000cc) including filter

Gearbox/Final Drive --- Manual 6.2 pints - Automatic

See Handbook

Transmission

Transmission
Description: Manual — Baulk synchronised four speed gearbox and hypoid bevel gear final drive in common alloy housing. Common lubrication for transmission and final drive. Double joint axle. Single dry plate clutch. Automatic — Hydrodynamic torque converter and planetary gear train with three forward gears and one reverse. Final drive in separate housing, and separate lubrication. Double joint axle.

Dimensions and Data*

	1 Ton
Gross Vehicle Weight	5070
Maximum permissible load — Front axle	2227
— Rear axle	2866
1600cc engine	2000
Kerb weight	2634
Payload	2436
2000cc engine	2150
Kerb weight	2679
Payload	2391
External dimensions	2001
Front track	54.9
Rear track	57.3
Ground clearance	7.9
Overall length	177
Overall width	67.6
Overall height	77
Internal dimensions	11
Rear door width	48.4
Rear door height	28.7
Atom Good Holgin	20.7
Permissible trailer weight (braked)	
1600cc:	2205lbs
2000cc Manual:	2645lbs
2000cc Automatic:	1323lbs
(See note 1.)	1020103
Permissible trailer load (unbraked)	1323lbs
Maximum nose weight	110lbs
Maximum roof load	220lbs
Maximum roof load	2201bs

Note 1: Towing with automatic transmission models only possible when ex factory towing bracket fitted. Maximum gradient 16%.

Note 2: Use only roof racks supported by rain channel and distribute load uniformly.

Gear ratios (Gradeability)

Gradeability 2000cc 2000cc A 3.78:1 (26%) 3.78:1 (28.5%) 2.06:1 (13%) 2.06:1 (14.5%) (Forward 1.26:1 (7.5%) 1.26:1 (7.5%) Range 25 0.82:1 (3.5%) (4.5%) 3.78:1 (26%) 3.28:1 (28.5%) (Reverse Range 18 2000cc Autó 2nd Range 25%) 3rd 4th Reverse Range 18%) Final Drive 5.43:1 4.57:1 4.36:1

Independent all round with torsion bars. Front: Twin cranked trailing arms. Rear: Semi trailing

Norm and roller with hydraulic damper Number of turns, lock to lock Turning circle: Kerb to kerb Turning circle: Wall to wall 37.2ft (11.34m) 40.4ft (12,31 m)

Electrical system

Voltage Earth Battery Negative 45 amp/hr 50 amp/700W (1600cc) 55 amp/770W (2000cc) Alternator

Braking system

Type front Disc Dual circuit system with brake pressure regulator Drum on rear wheels Handbrake Size front Mechanical on rear wheels 10.94 ins Size rear 9.92 ins Note: 9 in diameter servo fitted as standard on 2000cc

All steel self-supporting unitary construction.

Wheels and Tyres 1600cc:7.00 × 14 8PR 2000cc: 185R 14C radial Wheel: 5½2J × 14.

1600cc 2000cc Performance Maximum speed 68 mph 79 mph 76 mph Fuel consumption (DIN)** 24.8 mpg 22.6 mpg 21.2 mpg

*All weights in lbs and dimensions in inches, Pavload include weight of full tank of fuel, oil and all standard


equipment.
**German Industrial Standard DIN 70030: measured

at ^{3/4} max. speed. On level dry surface (max. gradient=1.5%); all tyres at correct pressure; at half max. permissible weight; max. wind speed=6.7 mph; over approx a 6 mile distance.

With the above conditions operative the vehicle is

driven, first in one direction and then immediately back

A number of European countries are starting to use the new international units for technical measurements.



Exterior Colours:

Marino Yellow Taiga Green Pastel White Neptune Blue Light Grey

- 1 Front seats accommodate 3 persons including driver.
 2 2 foldaway single seats which give easy access from
- 3 VW sliding doors on both sides of vehicle.
- 4 Forward facing bench seat for 3 persons with access
- Forward facing bench seat for 4 persons.
 Fixed step on both sides.
 35 cubic foot luggage platform.
 Access step to cab on both sides.
 Spare wheel located under front seat.

TRADE DESCRIPTIONS ACT 1968

Whilst every effort is made to ensure the accuracy of descriptions and specifications in this brochure, changes and alterations may be inevitable due to circumstances beyond our control. We therefore reserve the right to make such changes and alterations at any time without prior notice being given.

Devon Conversions Limited

Alexandria Works, Sidmouth, Devon EX10

Telephone (03955) 2345

Member of the Renwick Group