




This brochure is designed to provide answers to those often difficult to answer questions from prospects on Campmobile interior specifications. It supplements other sources of product information, the in-dealership training film, "The Campmobile," Campmobile literature and the Customers' Manual.

Floor Plan


		Length	Diennuigna
0	Rear facing passenger seat	15.4"	× 22.4"
	Storage locker below	21.5"	× 20.5"
0	Storage cabinet behind rear		
	facing passenger seat	5.3"	× 21.8"
Θ	Dinette table surface	19.7"	× 28.5"




Other Compmobile features:

ASHTRAY, An ashtray located near the dinette table has been provided for the convenience of passengers in addition to the dashmounted tray for the driver and front seat passenger. ARMREST, A matching vinyl covered armrest is provided at the left of the rear passenger seat for added passenger comfort. CABINETS. All cabinets and furniture components are made of 9-ply wood laminate and covered with wood grained scratch- and mar-proof plastic designed for easy maintenance, CARGO SHELF: Located in the ceiling area to the rear, a handy shelf has been provided to carry spare clathing and bedding. CURTAINS: Curtains with ties and rods are provided for all window areas including windshield, rear flop and right rear window. DINETTE TABLE. This table is sturdily mounted on the side wall and is hinged to swing into a vertical storage position when the bracina leg is disengaged. FLY SCREEN REAR FLAP. The snap fastened fly and mosquito net permits utilization of the reor flap for ventilation. ICE BOX UNIT: The polyfoam insulated ice

0	Utility table (folding inboard)	Wan Note
	surface	16.0" x 16.0"
0	fee box and sink cabinet	20.1" x 18.1"
0	Sink	14.0" x 10.7"
0	Utility table (folding outboard)	
-	surface	14.0" x 15.1"
0	Grocery cabinet	14.3" x 3.7"
	Clothes closet	24.0" x 11.4"
		38.0" x 11.4"
	Linen closef	
	Rear mattress	36.2" x 40.2"
0	Rear bench seat	19.7" x 46.1"
	Extended for bed	39.7" × 46.1"
	Overall bed length (extended)	75.9"
	Storage locker below	23.2" x 46.1"
0	Jump seat stool	17.7" x 14.6"
Ø	Split seat aisle way	46.5" x 15.1"
Ö		38.8" x 53.5"
w	Convas hammock	28 0" v 44 2"
40.00	Transport and the	1496 OFF 1 AV 1550 OF



box has a capacity of 1.6 cubic feet and enough space is provided in the ice tray to accommodate a 12" x 12" ice block. A handy utensil storage area complete with door is located directly under the sink. The sink and sink top is constructed of easy to maintain, durable stainless steel: LOUVERED JALOUSIE WINDOWS: Two aluminum jalousie windows are provided on the left and right side, respectively. One is located in the sliding door, the other on the left side directly opposite, They are specially designed for Campmobiles and they include removable aluminum screens and safety knab type operators, PUMP AND WATER TANK, The 71/2 gallon plastic water tank with a vented filler cap is located in the ice box unit. The wabble type pump has nylon moving parts to assure long life. The 11/4" diameter vertical drain trap vent plpe is required to meet State specifications: SPARE TIRE COVER: A vinyl leatherette tire cover is supplied to match the seat and mattress covers. The uphalstery covering on all seating components is removable, using snap fasteners for easy cleaning and replacement.

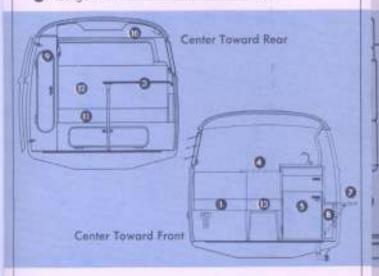

Other End View Features:

ELECTRICAL OUTLET: When connected to an outside supply, the 110 volt electrical double faced outlet is used to operate conventional electrical appliances. The outlet and master switch are fused for safety and the exterior receptacle is of all-weather construction, LIGHTING: Interior lighting in the passenger compartment features a three bulb, dual switch, ceiling mounted light, LOCKER DOOR: The locker beneath the rear bench seat has a 34.0" x 9.1" door providing easy occass to the storage area. MIRROR: A 4.7" x 27.5" dressing mirror is located on the reverse side of the clothes closet door, WALL AND CEILING PANELING. The best grade birch plywood imported from Finland is used to panel walls and ceilings. The ceiling panel is extended as a headlining for the driver's cab. Fiberglass insulation is installed behind all wood paneled areas.

Optional Freestanding Tent



0	Overall height	Dimensions 87.8"
	Overall length	116.1"
0	Overall width	76.8"
0	Height of forward corners	70.9"
	Height of rear corners	76.8"
	Width of front flap opening	36.2"




Other Features of the Freestanding Tent:

MATERIALS: The tent is of a high grade, but lightweight, weather-treated poplin, which is mildew resistant. The flooring is a hard wearing, moisture-resistant, heavy-duty vinyl. Tent poles and frames, color coded for ease in erecting the tent, are treated steel. Tent ties and grommets are rubber. Vents (windows), door openings and screens use high quality zippers for lasting and efficient operation. Screening for the windows and doors are plastic for pliability and long life. DESIGNI The tent has been especially designed to attach to the Camprobile with a boot that connects to the drip rail that has side panels and a lower apron to completely seal in the tent. The boot area has a large flap which can be unrolled, lowered, and zipped to make the tent a completely freestanding integral unit. External frame design, plus bracing by guy ropes provide for a strong and easily set up tent.

Optional Pop-Up Top and Luggage Rack

0	Luggage rack cargo area	Length 41.2"	Dimensions × 40.8"
	Folding cot (extended)	66.9"	× 22.8"
0	Ceiling cut out	42.9"	× 35.3"
	Cot (extended)	42.9"	x 15.4"
0	Pop-up top overall		× 53.7"
	Height from floor (headroom)		
	top extended	.90.0"	
	Height from ceiling top extended	34.9"	

Width



Other Features of the Pop-Up Top:

SIDE AND REAR VENTS: There are two zippered vents located on each side of the pop-up top which provide cross ventilation. The rear facing vent opening, 34.3" x 19.3" offers additional ventilation as well as access to the luggage rack. TIE DOWN HOOKS: The luggage rack is equipped with four tie down hooks to secure luggage. OPERATING HARDWARE: The pop-up top with its forward hinged cantilevered design and spring counter balanced supports is easily raised to an upright position. A grab handle is provided to facilitate raising and lowering the top. Three rubber tie down hooks secure the top when retracted.