



JK part numbers:
J20264

justKAMPERS.COM
Tech Sheet

JK Pop Up 365 Awning

Please Read Me!

Congratulations on the purchase of your new Just Kampers Pop-Up 365 Awning. We are sure you will enjoy this great new concept in camping.

As with any new purchase, there are important elements you will not be familiar with and some of these can actually be critical to protecting your investment. We want to help you as much as possible to get to grips with how to erect the Pop-Up 365 without damaging it or yourself. So please read the following as failure to do so will invalidate your 12 month warranty.

Here are 10 helpful tips to help you along the way.

- 1. Don't listen to anyone who tells you that reading and following instructions is uncool. Listen to us as we want to help!***
- 2. Always take care transporting your awning - never throw or drop it. Doing so can and probably will damage your awning.***
- 3. It's a good idea to practice pitching your awning in the garden a few times before actually heading off and using it, as it will become quicker and easier each time you do it. An added bonus to this is that you will look like a true professional when you set it up at a campsite.***
- 4. We'd recommend packing your tent last in your camper van, so you can unpack it easily when you arrive at your destination or back home.***
- 5. Do not attempt to set up your JK Pop-Up 365 in high winds. The chances of causing severe damage are high. This is an awning not a hang-glider!***
- 6. We highly recommend that two people carry out the erection of the awning - whilst we have designed it to be very easy to use, it is a large awning and therefore the fly sheet will be easier to fit over the main tent with two people.***
- 7. The flysheet must be fitted with the lower black skirts to the opposite side to the JK logos on the main tent.***
- 8. Always be cautious with all fixtures and fittings, if you have to use force at any time - STOP! You should not have to force anything and could be causing critical damage. You may find the spring clips on the extendable sliding poles need patience rather than brute force.***
- 9. Never try to disassemble the porch frame until you have unclipped the flysheet and unpegged the flysheet - if you do not adhere to this ruling you could easily rip the flysheet with the pin on the end of the straight arms of the five piece porch frame due to the tension on the arms. The onus is on you to follow this instruction as failing to do so could ruin your flysheet!***
- 10. Always pack down and pack away your awning with care. Make sure it's clean and dry before you pack it away as failure to do so could mean the fabric will suffer from mildew. Finally when releasing the central Pop-Up mechanism make certain you DO NOT stand with your head directly underneath it as when released, it will Pop-Down with considerable force, so stand to one side.***

Now, please refer to point one again and then turn over for the full instructions.

Happy Kamping!

Mark Reynolds and the JK team

**www.justkampers.com
0845 1204582**

Just Kampers, Unit 1 Stapeley Manor, Long Lane, Odiham, Hants. RG29 1JE

NB. Please note that whilst every attempt is made to ensure that these instructions are as accurate and clear as possible, we cannot be held responsible for misinterpretation of these instructions or for any subsequent accident or damage caused through mis-fitted parts.



JK part numbers:
J20264
OEM part number:
Not applicable

Page 1 of 7

JK Pop Up 365 Awning

Thank you for purchasing our JK Pop Up 365 awning. Please read these instructions to ensure a quick and easy set up with your new awning.

Before you start


Before setting off on holiday we recommend erecting the awning to familiarise yourself with the product.

BE CAUTIOUS OF ERECTING THE AWNING IN HIGH WINDS!

IMPORTANT: please read the packing down instructions as failure to do so may result in damage to the awning.

The awning kit contains:

(a)= awning rail; 3 pieces, (b)= tent pegs, (c)= 4x sun canopy poles, (d)= porch poles; 5 pieces, (e)= awning, (f)= flysheet

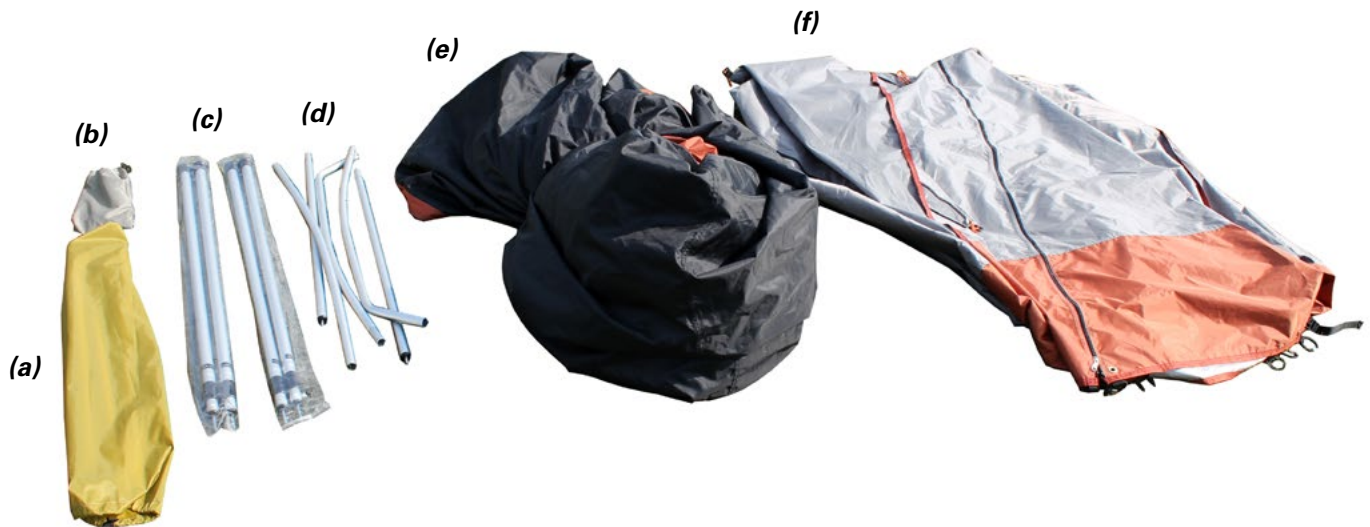

1. Choose an even flat surface free from debris and sharp objects.

Remove the awning from its bag.

Un-clip the retaining strap from around the frame and store the strap for packing down.

Place the awning end down with the poles facing up.



1. Place awning end down with poles facing up



JK part numbers:
J20264
OEM part number:
Not applicable
Page 2 of 7

2. Unfold the tent and pull the corners out to position so the floor area is taut, peg out the four corners and two centre rings at the base of each leg.



2. Unfold awning and pull corners taut, then peg down.

3. On the four outer legs extend the roof bars until they lock into position.

Attach the four black plastic clips on the roof to the extended poles.



3. Extend roof poles, attach clips.

4. Straighten all six legs so the lower knuckles lock into place.



4. Straighten all six legs so lower knuckles lock in place.



JK part numbers:
J20264
OEM part number:
Not applicable
Page 3 of 7

5. Unzip the entrance door and step inside, push the centre hub upwards from underneath, this will 'pop' into position.

Zip shut the entrance door as you exit.

Attach the remaining clip straps found at each leg.



5. Step inside, push up centre hub - it will 'pop' into place. Attach leg clips.

6. Unfold the flysheet and position it over the top of the awning (requires two people). Make sure the awning tunnel (black skirts) is positioned on the side WITHOUT the JK Logo.

At each corner attach the clip on the flysheet to the corresponding clip at the base of each leg and adjust to tension the flysheet.

Attach the two Velcro tabs found on the four outer legs.



6. Position flysheet over the awning.

7. Unpack the five poles for the front porch.

Attach the two curved end pieces to the centre span, creating a three piece porch pole.



7. Unpack the five porch poles and assemble.



JK part numbers:
J20264
OEM part number:
Not applicable
Page 4 of 7

8. CAREFULLY push the porch pole through the pocket on the leading edge of the porch.

This requires some patience!



8. Push the porch pole through the porch pocket.

9. BEWARE! The porch pole assembly MUST be positioned centrally in the pocket or there will be uneven tension when inserting the end pins, risking damage to the awning.



9. The porch pole must be positioned centrally.

10. Attach the two end sections to the porch pole and then CAREFULLY insert the pins on the end sections into the holes on both leg straps.

This requires two people and some care to avoid damaging the awning.



10. CAREFULLY insert the pins on the end sections into the holes on both leg straps.



JK part numbers:
J20264
OEM part number:
Not applicable
Page 5 of 7

11. Before proceeding, make sure the awning doors are zipped shut.

Unzip from the storage pouch and peg out the two guy ropes on each outer leg diagonally from the awning corner.

Peg out the remaining elasticated pegging hoops.



11. Place awning end down with poles facing up.

12. To the rear of the awning position your vehicle 2ft (60cms) from the edge of the legs.

Unpack the three small diameter poles that make up the awning pole and assemble.

Push this through the pocket on the leading edge of the awning tunnel and place in your vehicle gutter using three gutter clamps to secure this in place. (Alternatively use a figure of 8 or awning rail).

Pull the two elasticated end panels into place and peg down the elasticated loops on each corner.



12. Assemble awning pole, push through pocket on awning and clamp to vehicle gutter.

13. Finally, if you wish to make use of the sun canopies, do the following;

Unzip the sides of the flysheet.

Extend the sun canopy poles and twist to lock. Insert the pin ends of the poles through the holes in the corners of the awning side panel.

Loop the guy ropes over the pins and tension the guys diagonally so that the canopy is taut and able to support itself.



13. The completed awning with sun canopies extended!



JK part numbers:
J20264
OEM part number:
Not applicable
Page 6 of 7

Packing down

1. Before packing down make sure the awning is dry, otherwise mildew may form.

Remove the gutter clamps from your vehicle, extract the three part pole and disassemble.

If the sun canopies are in use release the guys, remove the poles and zip up the awning sides.

Remove the pegs from the elasticated pegging loops and from the guy ropes, but leave the corner ground pegs in for now. Roll up and return the guys to the zipped pockets.

Undo the four clips and Velcro tags on each leg.

2. Before proceeding MAKE SURE ALL GUYS HAVE BEEN RELEASE AND PACKED AWAY!

CAREFULLY remove the porch end pins, failure to do so could result in tearing the awning fabric.

Now remove the end sections and then remove the porch pole from the porch and disassemble.

Remove the fly sheet and fold up ready to fit in the carry bag.

3. Before proceeding MAKE SURE ALL WINDOW FLAPS AND DOORS ARE ZIPPED UP!

IMPORTANT: Unfasten the clips and Velcro tags from the frame (failure to do this may result in damage to the pop mechanism!)

Go inside the awning, grab the pull handle in the centre of the roof and pull down - AVOID STANDING DIRECTLY BENEATH THE CENTRE HUB AS YOU PULL IT DOWN!

Once the roof is down, exit the awning and zip up the door.



1. Remove guys, undo four leg clips and Velcro tags.



2. CAREFULLY remove end poles and slide out porch pole. Remove and fold up flysheet.



3. Unfasten 'C' clips and Velcro from the frame, go inside and pull down the handle to collapse the awning.

www.justkampers.com
0845 1204582

Just Kampers, Unit 1 Stapeley Manor, Long Lane, Odiham, Hants. RG29 1JE
NB. Please note that whilst every attempt is made to ensure that these instructions are as accurate and clear as possible, we cannot be held responsible for misinterpretation of these instructions or for any subsequent accident or damage caused through mis-fitted parts.



JK part numbers:
J20264
OEM part number:
Not applicable
Page 7 of 7

4. On the outside press the release buttons on all six lower knuckles and fold the legs in.

On the four outer roof bars press in the release buttons and push the poles back into the closed position.

Remove roof clips.



4. Release lower knuckles, fold legs. Release roof bar buttons and push in.

5. Remove the six pegs from the ground sheet and fold all six legs to the centre.

Neatly wrap the canvas around the legs and secure with the retaining strap.



5. Fold legs to centre, wrap canvas around legs and secure with retaining strap.

6. The awning poles and pegs should go in the bag first followed by the awning with the flysheet on top.

Make sure sharp parts such as pegs don't cut or rub the material during storage/transport.



6. Pack poles and pegs into the bag first, followed by the awning with the flysheet on top.